
FRESVUE

NuaTeK Global LLC

ZTAG-D

Single-Use Temperature Data Logger

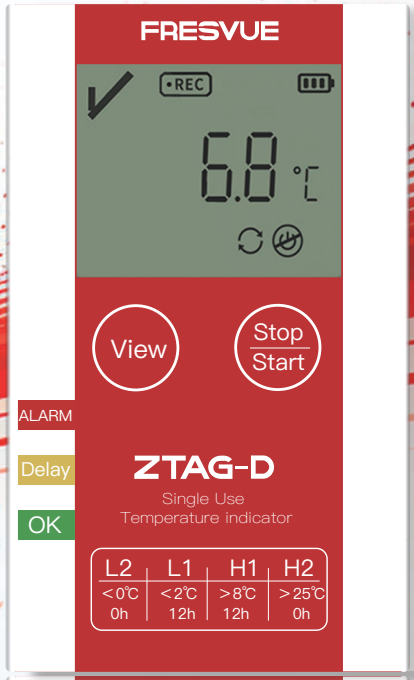

Technical Specifications

Battery life	Up to 2 years（1 year storage / 1 year useful life）@25°C，5 minutes monitor interval
Operation Temperature	-30°C~70°C
Measurement Accuracy	±0.5°C@-10~40°C，±0.8°C@-30~-10°C &40~70°C
Resolution	0.1°C
Alarm Limit	Up to 4 individually programmable alarm limits（Alarm threshold and over-temperature trigger time can be customized according to customer needs）
Monitor Interval	1 minute -24 hours optional（Default 10 minutes）
Start Delay	0 minute -24 hours optional（Default 15minutes）
Start Mode	Manual start
IP Grade	IP67
Battery Type	3.0V CR2032
Packing	Food grade composite bag
Weight	13.5g
Dimensions	62*36*8mmmm
Certification	CE，EN12830:2018，RTCA/DO-160G，RoHS

Air Transport Compliant

Meets RTCA/DO-160G standards- safe for air shipment even when active.

Long Battery-Life

Low-power circuitry with extended battery life— ensures reliable uninterrupted monitoring for long-distance shipments.

Low Cost

Cost-effective disposable monitoring solution— lowers overall logistics quality control expenses for bulk usage.

Simple and easy to use

User-friendly one-touch operation - ready to use out of the box with no complicated setup.

About Us

Shams Free Zone, Al Messaned,Al Bataeh, Sharjah, UAE, PO Box:66636

contact No: +971 54 370 4505

Email: sales@nuatekglobal.com